

Crown - nut

SERIE ITQ2S

S E R I E S

SQUARE INSERT FOR THE INTERIOR OF SQUARE TUBES



APPLICATION
At the end of square metallic and non-metallic tubes.
ASSEMBLY
By pressure.

PRODUCT		CODE	Metric thread	Internal dimension of the tube	Crown diameter	Total length
S**	R***		(d1)	(L2*)	(L1)	(L)
●		ITQ2S/M 6/15.7	M 6	15,7 ÷ 17,1	18,3	11
●		ITQ2S/M 6/17.6		17,6 ÷ 18,1	19,3	10
●		ITQ2S/M 6/18.9		18,9 ÷ 20,2	21,6	10
●		ITQ2S/M 6/22.1		22,1 ÷ 23,4	24,3	14,2
●		ITQ2S/M 6/26.0		26,0 ÷ 28,0	29,2	12
●		ITQ2S/M 8/15.7	M 8	15,7 ÷ 17,1	18	15
●		ITQ2S/M 8/18.9		18,9 ÷ 20,2	21,4	14
●		ITQ2S/M 8/22.1		22,1 ÷ 23,4	24,3	13,8
●		ITQ2S/M 8/26.0		26,0 ÷ 28,0	29,1	16,2
●		ITQ2S/M 8/34.8		34,8 ÷ 36,1	37,4	17,3


S** standard	R*** on demand
------------------------	--------------------------

MATERIAL

Steel

• **EXAMPLE**

2-crowns without flange insert for square tubes, M 6 thread, tube internal dimension 20x20 mm: **ITQ2S/M 6/18.9**

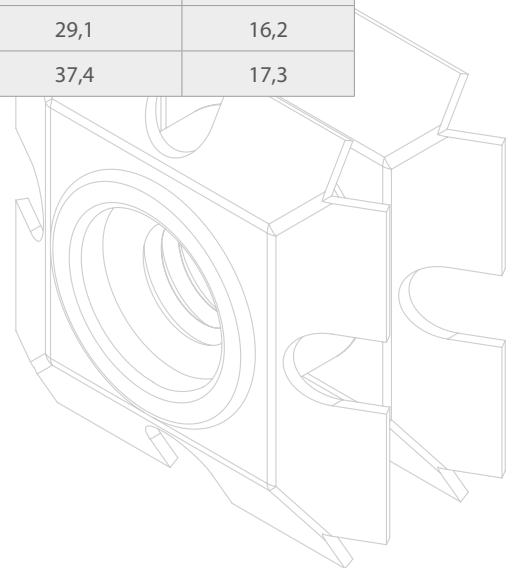

* It is advisable to carry out some preliminary assembling tests in order to determine the best product. After the insertion of the Crown - nut do avoid heat treatments, galvanization and other heating operations that might compromise the characteristics of the product.

Non binding dimensions, expressed in mm.

