

STEP 1 PRY SERIES

Threaded stud with plate and round spacers

STEP 2 Stud Length (L) 10* - 12 - 16 - 20 - 25 - 30 - 40

* 316 Stainless Steel not available

For stud length over 40mm, see PRSY data sheet


STEP 3 Plate type



Y2000=Ø20




Y2300=Ø23




Y3800=Ø38



Y3815=38x15



Y3232=32x32



Y5858=58x58

STEP 4 Thread (M) M4 - M5 - M6 - M8

Tolerance 6g


For M10 thread, see PRSY data sheet

STEP 5 Material

Zinc Plated Steel .12
Electropolished 316 Stainless Steel .56

CODE	d1 Thread	d2 Steel .12	d2 Stainless Steel .56	CODE	d1 Thread	d2 Steel .12	d2 Stainless Steel .56
PR_Y2000040._	M 4	5,5	8,5	PR_Y3815040._	M 4	5,5	8,5
PR_Y2300040._				PR_Y3232040._			
PR_Y3800040._				PR_Y5858040._			
PR_Y2000050._	M 5	6,5	9,8	PR_Y3815050._	M 5	6,5	9,8
PR_Y2300050._				PR_Y3232050._			
PR_Y3800050._				PR_Y5858050._			
PR_Y2000060._	M 6	7,5	9,8	PR_Y3815060._	M 6	7,5	9,8
PR_Y2300060._				PR_Y3232060._			
PR_Y3800060._				PR_Y5858060._			
PR_Y2000080._	M 8	10,0	11,5	PR_Y3815080._	M 8	10,0	11,5
PR_Y2300080._				PR_Y3232080._			
PR_Y3800080._				PR_Y5858080._			


Le dimensioni sono indicative, non vincolanti, espresse in mm – Non binding dimensions, expressed in mm.

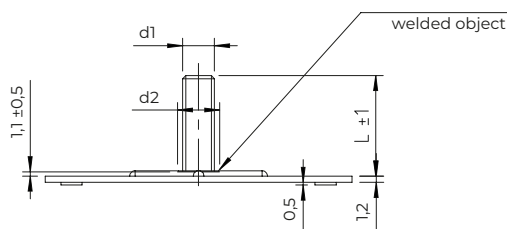

PR 20 Y3815 060. 12

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5

Example of code designation: Threaded stud with Y3815 rectangular plate, M6 thread, 20mm length, zinc-plated steel



PR20Y3815060.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu

STEP 1 **PRSY** **SERIES**


Threaded stud with countersunk head and plate with round spacers

STEP 2 Stud Length (L) 45 - 50 - 60 - 70 - 80 - 90 - 100


For stud length under 45mm, see PRY data sheet

STEP 3 Plate type


Y2000=Ø20




Y2300=Ø23




Y3800=Ø38



Y3232=32x32



Y3815=38x15




Y5858=58x58

STEP 4 Thread (M) M5 - M6 - M8 - M10
Tolleranza 6g / Tolerance 6g**STEP 5** MaterialZinc Plated Steel .12
Electropolished 316 Stainless Steel .56


CODE	d1 Thread	d2 (max)	K
PRS_Y2000050._	M 5	10	2,8
PRS_Y2300050._			
PRS_Y3800050._			
PRS_Y2000060._	M 6	12	3,3
PRS_Y2300060._			
PRS_Y3800060._			
PRS_Y2000080._	M 8	16	4,4
PRS_Y2300080._			
PRS_Y3800080._			
PRS_Y3800100._	M 10	20	5,5

CODE	d1 Thread	d2 (max)	K
PRS_Y3232050._	M 5	10	2,8
PRS_Y3815050._			
PRS_Y5858050._			
PRS_Y3232060._	M 6	12	3,3
PRS_Y3815060._			
PRS_Y5858060._			
PRS_Y3232080._	M 8	16	4,4
PRS_Y3815080._			
PRS_Y5858100._	M 10	20	5,5

Non binding dimensions, expressed in mm.

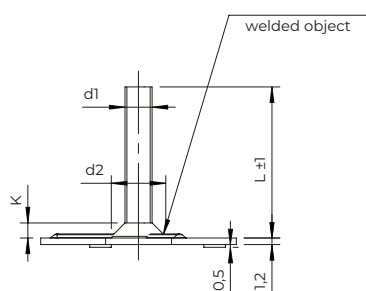**PRS 50 Y5858 050. 12****STEP 1 STEP 2 STEP 3 STEP 4 STEP 5**

Example of code designation: Threaded stud with Y3815 rectangular plate, M5 thread, 50mm length, zinc-plated steel



PRS50Y5858050.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu