

STEP 1 BRC SERIES

Threaded bush with blind plate

STEP 2 Bush height (L) 5 - 10 - 12 - 15 - 20 - 22 - 25

STEP 3 Plate type




T1900=Ø19




T2000=Ø20



T2300=Ø23




T3800=Ø38



Q3232=32x32



R3815=38x15



Q5858=58x58

STEP 4 Thread (M) M4 - M5 - M6 - M8 - M10
Tolerance 6H

STEP 5 Material Zinc Plated Steel .12
316 Stainless Steel .51



CODE	d1 Thread	d2	d3	CODE	d1 Thread	d2	d3
BRC_T1900040._	M 4	12	8,3	BRC_Q3232040._	M 4	12	8,3
BRC_T2000040._				BRC_R3815040._			
BRC_T2300040._				BRC_Q5858040._			
BRC_T3800040._				BRC_Q3232050._			
BRC_T1900050._	M 5	13	9,6	BRC_R3815050._	M 5	13	9,6
BRC_T2000050._				BRC_Q5858050._			
BRC_T2300050._				BRC_Q3232060._			
BRC_T3800050._				BRC_R3815060._			
BRC_T1900060._	M 6	13	9,6	BRC_Q5858060._	M 6	13	9,6
BRC_T2000060._				BRC_Q3232080._			
BRC_T2300060._				BRC_R3815080._			
BRC_T3800060._				BRC_Q5858080._			
BRC_T2300080._	M 8	15	11,0	BRC_Q3232100._	M 10	16	12,6
BRC_T3800080._				BRC_R3815100._			
BRC_T2300100._	M 10	16	12,6	BRC_Q5858100._			
BRC_T3800100._							

NB L1= threaded lenght (max 3 times ø)
Non binding dimensions, expressed in mm.

BRC 15 R3815 060. 12

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5

Example of code designation: Threaded bush with R3815 rectangular blind plate, M6 thread, 15mm lenght, zinc-plated steel

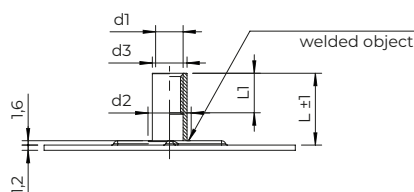

BRC15R3815060.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

STEP 1 **BRP** **SERIES**

Threaded bush with through-hole plate

STEP 2 Bush height (L) 5 - 10 - 12 - 15 - 20 - 22 - 25**STEP 3** Plate type

T1900=Ø19



T2000=Ø20



T2300=Ø23




T3800=Ø38



Q3232=32x32



R3815=38x15




Q5858=58x58

STEP 4 Thread (M) M4 - M5 - M6 - M8 - M10
Tolerance 6H**STEP 5** MaterialZinc Plated Steel
316 Stainless Steel.12
.51


CODE	d1 Thread	d2	d3	CODE	d1 Thread	d2	d3
BRP_T1900040._	M 4	12	8,3	BPR_Q3232040._	M 4	12	8,3
BRP_T2000040._				BPR_R3815040._			
BRP_T2300040._				BPR_Q5858040._			
BRP_T3800040._				BPR_Q3232050._	M 5	13	9,6
BRP_T1900050._	M 5	13	9,6	BPR_R3815050._			
BRP_T2000050._				BPR_Q5858050._			
BRP_T2300050._				BPR_Q3232060._	M 6	13	9,6
BRP_T3800050._				BPR_R3815060._			
BRP_T1900060._	M 6	13	9,6	BPR_Q5858060._			
BRP_T2000060._				BPR_Q3232080._	M 8	15	11,0
BRP_T2300060._				BPR_R3815080._			
BRP_T3800060._				BPR_Q5858080._			
BRP_T2300080._	M 8	15	11,0	BPR_Q3232100._	M 10	16	12,6
BRP_T3800080._				BPR_R3815100._			
BRP_T2300100._	M 10	16	12,6	BPR_Q5858100._			
BRP_T3800100._							

/ NB L1= threaded length (max 3 times Ø)
Non binding dimensions, expressed in mm.**BRP 15 R3815 060. 12****STEP 1** **STEP 2** **STEP 3** **STEP 4** **STEP 5**

Example of code designation: Threaded bush with R3815 rectangular through-hole plate, M6 thread, 15mm length, zinc-plated steel



BRP15R3815060.12

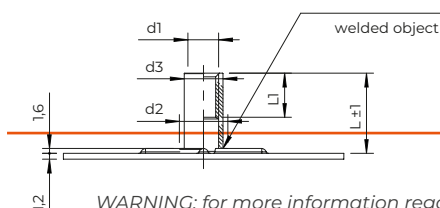

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.