

STEP 1 DFCY SERIES

Flanged nut with blind plate and round spacers

STEP 2 Nut height (L) 4,3 - 4,8 - 5,4


STEP 3 Plate type



Y2000=Ø20




Y2300=Ø23




Y3800=Ø38



Y3815=38x15



Y3232=32x32



Y5858=58x58


STEP 4 Thread (M) M4 - M5 - M6 Tolerance 6H

STEP 5 Material

Zinc Plated Steel .12
Electropolished 316 Stainless Steel .56

CODE	d1 Thread	Hex Key	e	d2	L	CODE	d1 Thread	Hex Key	d2	L
DFC04Y2000040._						DFC04Y3815040._				
DFC04Y2300040._	M 4	7	7,8	9,10	4,3	DFC04Y3232040._	M 4	7	9,10	4,3
DFC04Y3800040._						DFC04Y5858040._				
DFC05Y2000050._						DFC05Y3815050._				
DFC05Y2300050._	M 5	8	8,9	10,50	4,8	DFC05Y3232050._	M 5	8	10,50	4,8
DFC05Y3800050._						DFC05Y5858050._				
DFC06Y2000060._						DFC06Y3815060._				
DFC06Y2300060._	M 6	10	11,1	12,95	5,4	DFC06Y3232060._	M 6	10	12,95	5,4
DFC06Y3800060._						DFC06Y5858060._				

Non binding dimensions, expressed in mm.

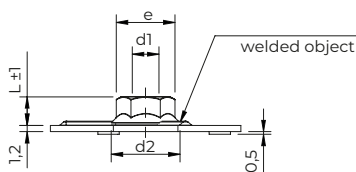

DFC 05 Y3815 050. 12

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5

Example of code designation: Flanged threaded nut with Y3815 rectangular blind plate, M5 thread, 4,8mm height, zinc-plated steel



DFC05Y3815050.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu

STEP 1 **DFPY** SERIES


Flanged nut with through-hole plate and round spacers

STEP 2 Nut height (L) 4,3 – 4,8 – 5,4**STEP 3** Plate type

Y2000=ø20




Y2300=ø23




Y3800=ø38



Y3815=38x15



Y3232=32x32




Y5858=58x58

STEP 4 Thread (M) M4 - M5 - M6 Tolerance 6H**STEP 5** MaterialZinc Plated Steel .12
Electropolished 316 Stainless Steel .56


CODE	d1 Thread	Hex Key	e	d2	L
DFP04Y2000040._					
DFP04Y2300040._	M 4	7	7,8	9,10	4,3
DFP04Y3800040._					
DFP05Y2000050._					
DFP05Y2300050._	M 5	8	8,9	10,50	4,8
DFP05Y3800050._					
DFP06Y2300060._	M 6	10	11,1	12,95	5,4
DFP06Y3800060._					

CODE	d1 Thread	Hex Key	e	d2	L
DFP04Y3815040._					
DFP04Y3232040._	M 4	7	7,8	9,1	4,3
DFP04Y5858040._					
DFP05Y3815050._					
DFP05Y3232050._	M 5	8	8,9	10,5	4,8
DFP05Y5858050._					
DFP06Y3815060._					
DFP06Y3232060._	M 6	10	11,1	12,95	5,4
DFP06Y5858060._					

Non binding dimensions, expressed in mm.

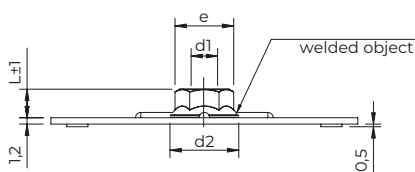**DFP 05 Y3815 050. 12****STEP 1 STEP 2 STEP 3 STEP 4 STEP 5**

Example of code designation: Flanged threaded nut with Y3815 rectangular through-hole plate, M5 thread, 4,8mm height, zinc-plated steel



DFP05Y3815050.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu

STEP 1 **DRCY** SERIES

Nut with blind plate and round spacers

STEP 2 Nut height (L) 6,5 – 8,0


STEP 3 Plate type




Y2000=ø20




Y2300=ø23




Y3800=ø38



Y3815=38x15



Y3232=32x32



Y5858=58x58

STEP 4 Thread (M) M8 - M10 Tolerance 6H


STEP 5 Material

Zinc Plated Steel .12
Electropolished 316 Stainless Steel .56

CODE	d1 Thread	Hex Key	e	L
DRC06Y2300080._	M 8	13	14,4	6,5
DRC06Y3800080._	M 8	13	14,4	6,5
DRC08Y2300100._	M 10	17	19,0	8,0
DRC08Y3800100._	M 10	17	19,0	8,0

CODE	d1 Thread	Hex Key	e	L
DRC06Y3815080._	M 8	13	13	6,5
DRC06Y3232080._	M 8	13	13	6,5
DRC06Y5858080._	M 8	13	13	6,5
DRC08Y3815100._	M 10	17	17	8,0
DRC08Y3232100._	M 10	17	17	8,0
DRC08Y5858100._	M 10	17	17	8,0


Non binding dimensions, expressed in mm.

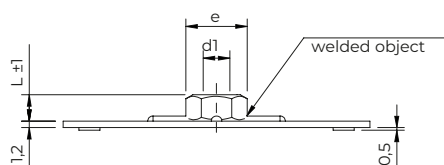

DRC 06 Y3815 080. 12

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5

Example of code designation: Threaded nut with Y3815 rectangular blind plate, M8 thread, 6,5mm height, zinc-plated steel



DRC06 Y3815 080.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu

STEP 1 DRPY SERIES

Nut with through-hole plate and round spacers

STEP 2 Nut height (L) 6,5 – 8,0


STEP 3 Plate type



Y2000=ø20




Y2300=ø23




Y3800=ø38



Y3815=38x15



Y3232=32x32



Y5858=58x58

STEP 4 Thread (M) M8 - M10 / Tolerance 6H


STEP 5 Material

Zinc Plated Steel .12
Electropolished 316 Stainless Steel .56

CODE	d1 Thread	Hex Key	e	L
DRP06Y2300080._	M 8	13	14,4	6,5
DRP06Y3800080._	M 8	13	14,4	6,5
DRP08Y3800100._	M 10	17	19,0	8,0

CODE	d1 Thread	Hex Key	e	L
DRP06Y3815080._	M 8	13	14,4	6,5
DRP06Y3232080._	M 8	13	14,4	6,5
DRP06Y5858080._	M 8	13	14,4	6,5
DRP08Y3815100._	M 10	17	19,0	8,0
DRP08Y3232100._	M 10	17	19,0	8,0
DRP08Y5858100._	M 10	17	19,0	8,0


Non binding dimensions, expressed in mm.

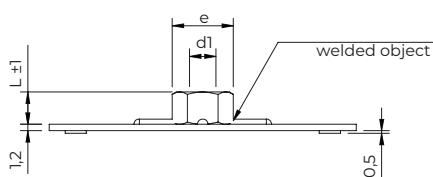

DRP 06 Y3815 080. 12

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5

Example of code designation: Threaded nut with Y3815 rectangular through-hole plate, M8 thread, 6,5 mm height, zinc-plated steel



DRP06Y3815080.12

WARNING: for more information regarding product availability and feasibility, please contact the tech/sales office.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu